



PUMP PERFORMANCE

H75 SRC SERIES

B FRAME


FLOW RANGE: 18 - 32

OPERATE WITHIN DESIGNATED
AREA ONLY

$$HP = \left(\frac{GPM \times (PSI \times 2.31)}{3960} \right) \div \text{EFFICIENCY}$$

IMPORTANT : 10 PSI MINIMUM INLET PRESSURE
REQUIRED. FOR GRAVITY FEED APPLICATIONS
CONTACT FACTORY.
FEED WATER NOT TO EXCEED 85 °F. FOR HIGHER
WATER TEMPERATURES CONTACT FACTORY.
PERFORMANCE @ 70 °F WATER TEMPERATURE, 1.0
SP. GRAVITY.

25 GPM #25
3600 rpm 460V 3Ø
60Hz

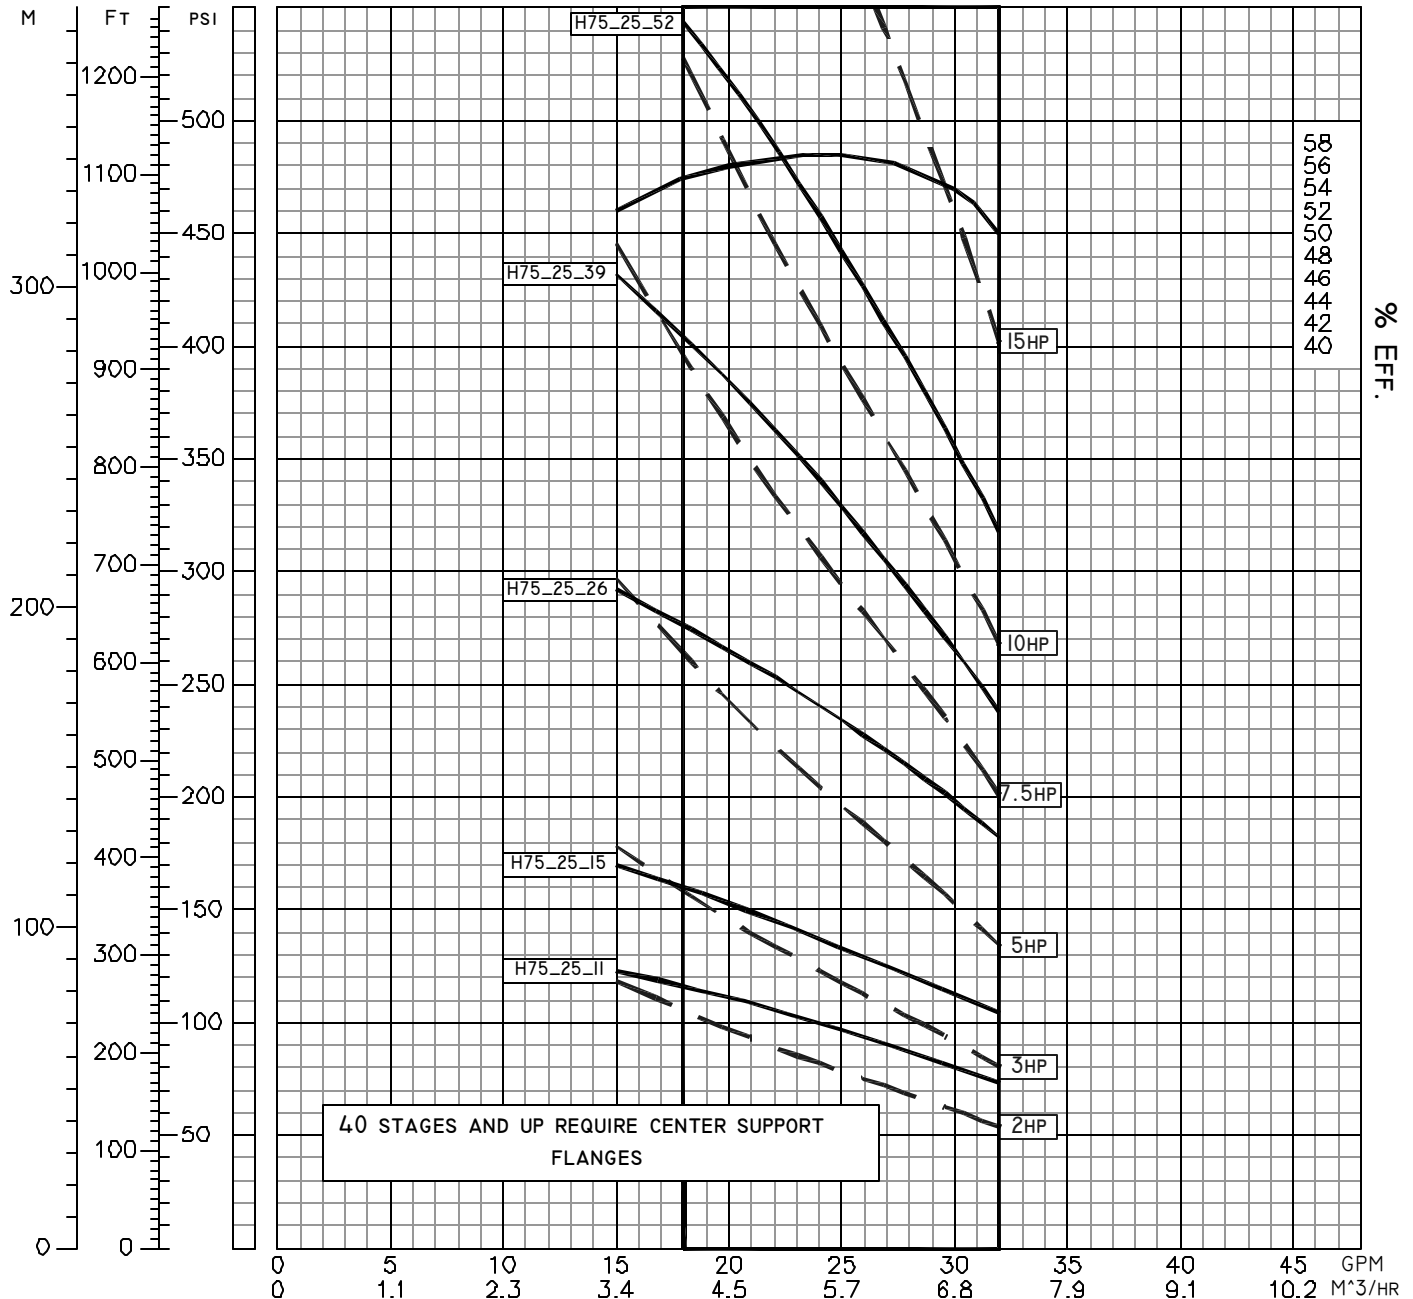

40 STAGES AND UP REQUIRE CENTER SUPPORT
FLANGES

PERFORMANCE IS BASED ON 3600 (NOMINAL) RPM, 60 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED CURVE MAY BE ORDERED AT ADDITIONAL COST IF ACCOMPANIED BY AN ORDER AND ONLY AFTER PUMP HAS BEEN TESTED.

MANUFACTURED BY : T&T PUMP Co. INC.
RT 8 Box 343
FAIRMONT, WV 26554
11/24/99



SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT NOTICE