



# PUMP PERFORMANCE


H79 SERIES

$$HP = \frac{[GPM \times (PSI \times 2.31)]}{3960 \times \text{EFFICIENCY}}$$

250 GPM  
 3600 rpm 460V 3Ø  
 60Hz

FLOW RANGE: 100-300  
 OPERATE WITHIN DESIGNATED  
 AREA ONLY

IMPORTANT: 10 PSI MINIMUM INLET PRESSURE REQUIRED. FOR GRAVITY FEED APPLICATIONS CONTACT FACTORY.  
 FEED WATER NOT TO EXCEED 85 °F. FOR HIGHER WATER TEMPERATURES CONTACT FACTORY.  
 PERFORMANCE @ 70 °F WATER TEMPERATURE, 1.0 SP. GRAVITY.

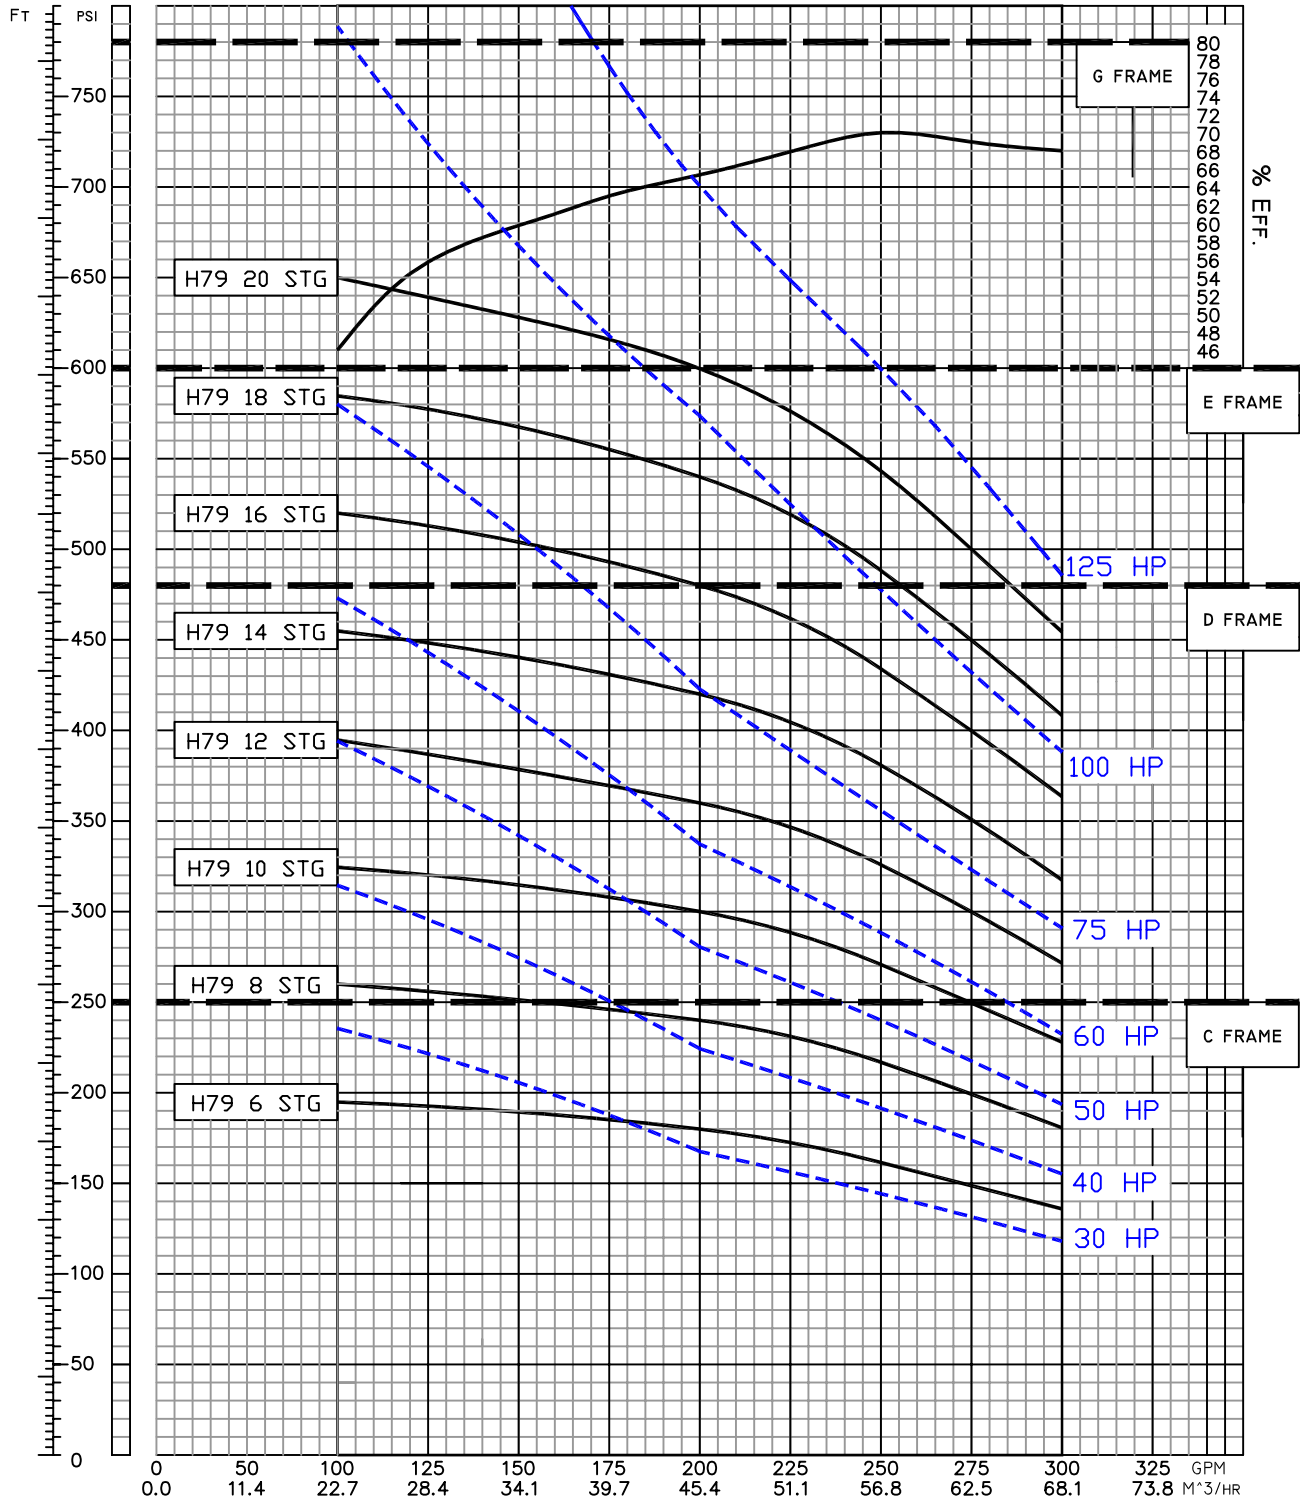

PERFORMANCE IS BASED ON 3600 (NOMINAL) RPM, 60 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED CURVE MAY BE ORDERED AT ADDITIONAL COST IF ACCOMPANIED BY AN ORDER AND ONLY AFTER PUMP HAS BEEN TESTED.

MANUFACTURED BY : T&T PUMP CO. INC.  
 9/18/98 RT 8 Box 343  
 FAIRMONT, WV 26554



SPECIFICATIONS SUBJECT TO  
 CHANGE WITHOUT NOTICE