



PUMP PERFORMANCE


H86 SRC Series

$$HP = \frac{[GPM \times (PSI \times 2.31)]}{3960 \times \text{EFFICIENCY}}$$

300 gpm #60
 3600 rpm 460V 3Ø
 60Hz

FLOW RANGE: 150 - 450
 OPERATE WITHIN SHADED
 AREA ONLY

IMPORTANT: 10 PSI MINIMUM INLET PRESSURE
 REQUIRED. FOR GRAVITY FEED APPLICATIONS
 CONTACT FACTORY
 FEED WATER NOT TO EXCEED 85 °F. FOR HIGHER
 WATER TEMPERATURES CONTACT FACTORY.
 PERFORMANCE @ 70 °F WATER TEMPERATURE, 1.0
 SP. GRAVITY.

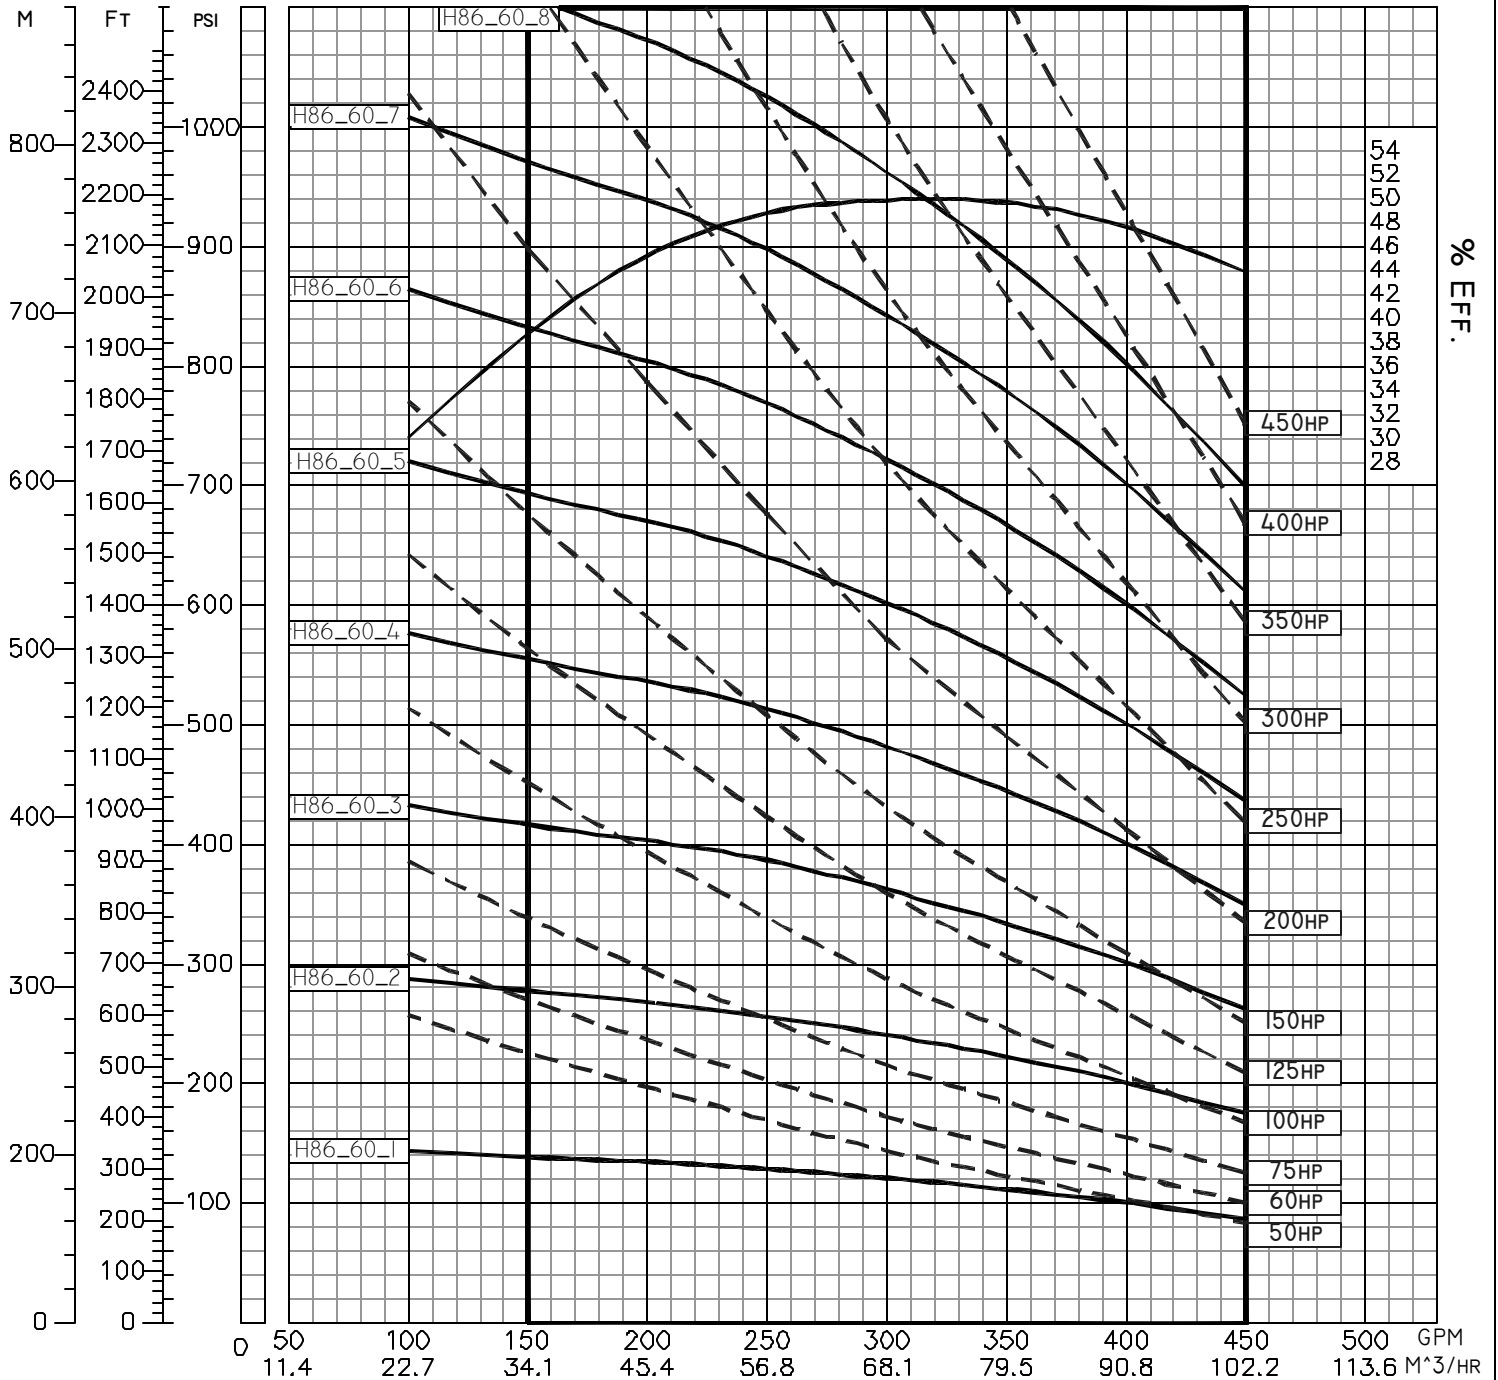

PERFORMANCE IS BASED ON 3600 (NOMINAL) RPM, 60 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED CURVE MAY BE ORDERED AT ADDITIONAL COST IF ACCOMPANIED BY AN ORDER AND ONLY AFTER PUMP HAS BEEN TESTED.

MANUFACTURED BY : T&T PUMP Co. INC.
 8/11/98 RT 8 Box 343
 FAIRMONT, WV 26554



SPECIFICATIONS SUBJECT TO
 CHANGE WITHOUT NOTICE