



PUMP PERFORMANCE

H80 SRC SERIES


120 GPM #2

2900 RPM 380V 3Ø
50Hz

FLOW RANGE: 40 - 140
OPERATE WITHIN DESIGNATED
AREA ONLY

$$HP = \frac{[GPM \times (PSI \times 2.31)]}{3960 \times \text{EFFICIENCY}}$$

IMPORTANT : 10 PSI MINIMUM INLET PRESSURE REQUIRED. FOR GRAVITY FEED APPLICATIONS, CONTACT FACTORY. FEED WATER NOT TO EXCEED 85° F. FOR HIGHER WATER TEMPERATURES, CONTACT FACTORY.

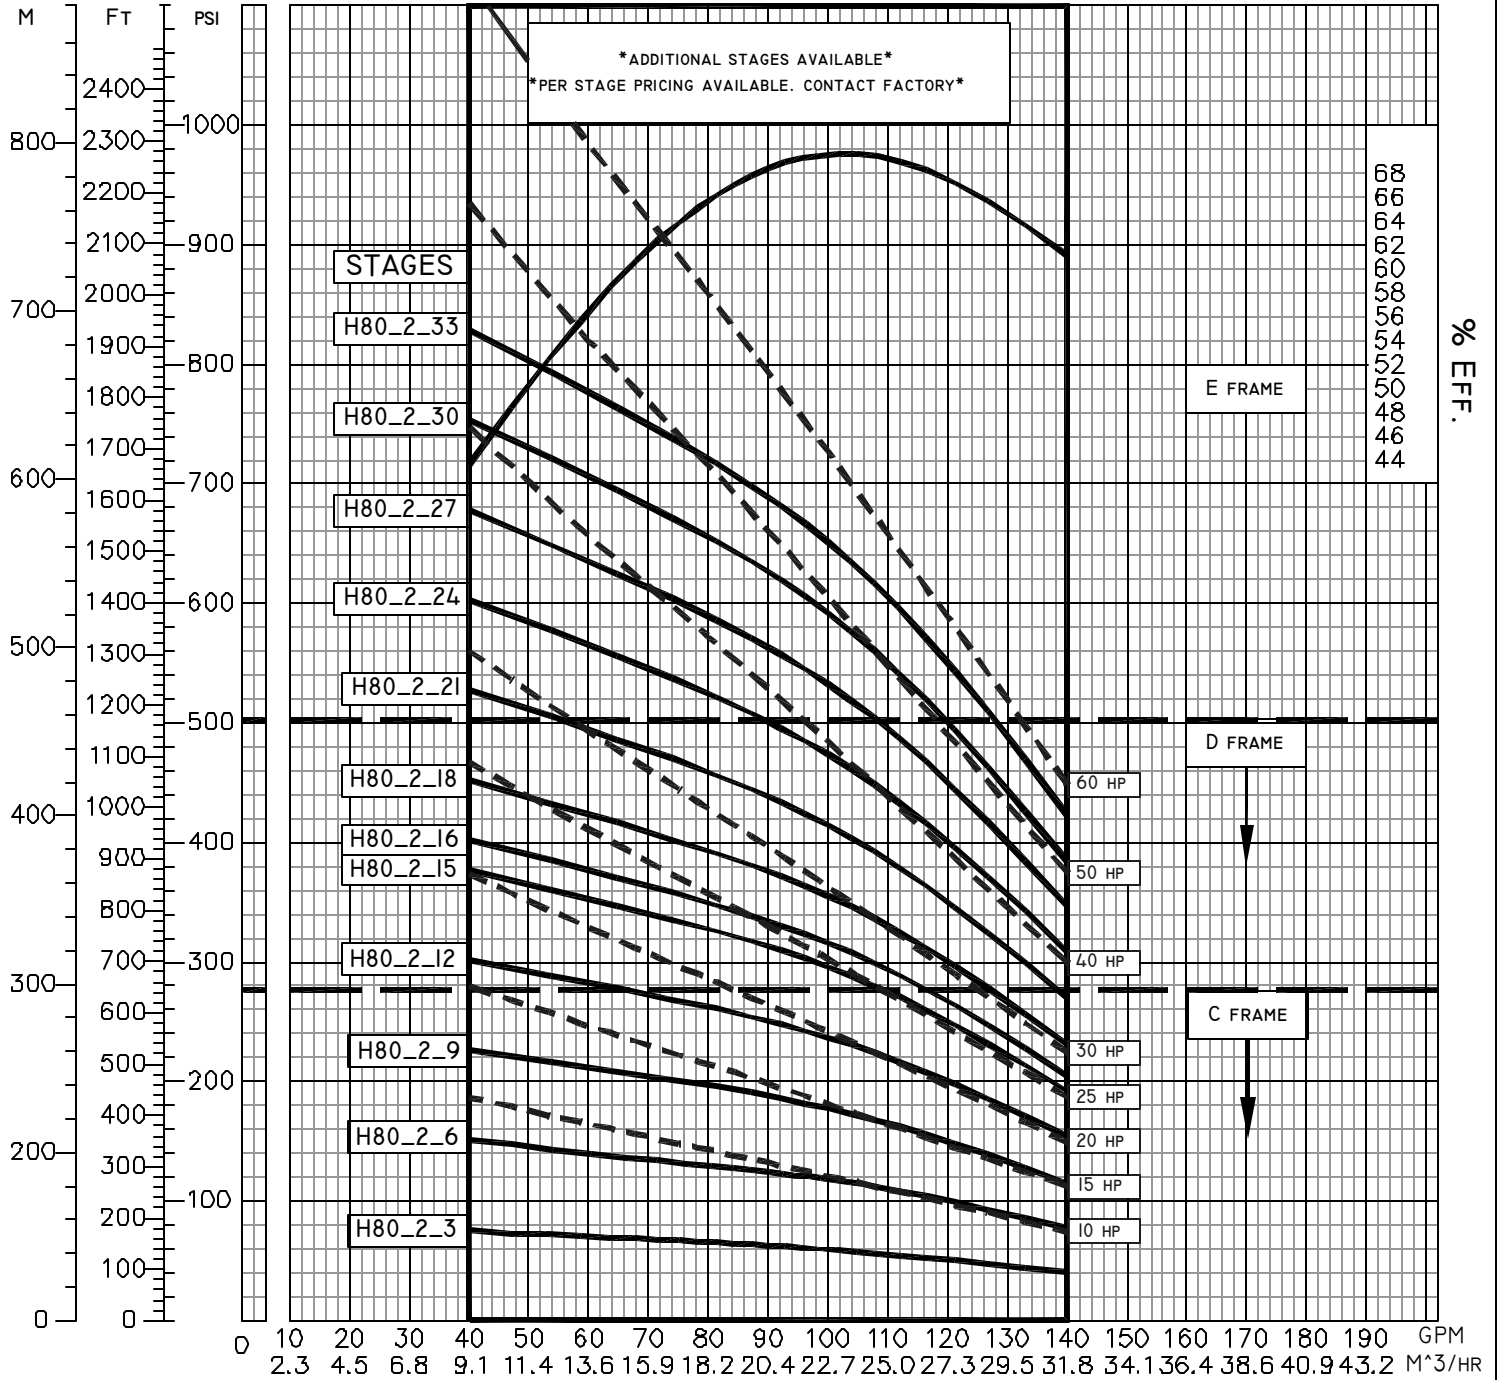

PERFORMANCE IS BASED ON 2900 (NOMINAL) RPM, 50 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED CURVE MAY BE ORDERED AT ADDITIONAL COST IF ACCOMPANIED BY AN ORDER AND ONLY AFTER PUMP HAS BEEN TESTED.

MANUFACTURED BY: T&T PUMP Co. INC.
RT 8 Box 343
FAIRMONT, WV 26554



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

6/5/00