



PUMP PERFORMANCE

H80 SRC Series


$$HP = \frac{[GPM \times (PSI \times 2.31)]}{3960 \times \text{EFFICIENCY}}$$

120 GPM #2

3600 rpm 460V 3∅
60Hz

FLOW RANGE: 60 - 175
OPERATE WITHIN DESIGNATED
AREA ONLY

IMPORTANT : 10 PSI MINIMUM INLET
PRESSURE REQUIRED. FOR GRAVITY FEED
APPLICATIONS, CONTACT FACTORY.
FEED WATER NOT TO EXCEED 85° F. FOR
HIGHER WATER TEMPERATURES, CONTACT
FACTORY.

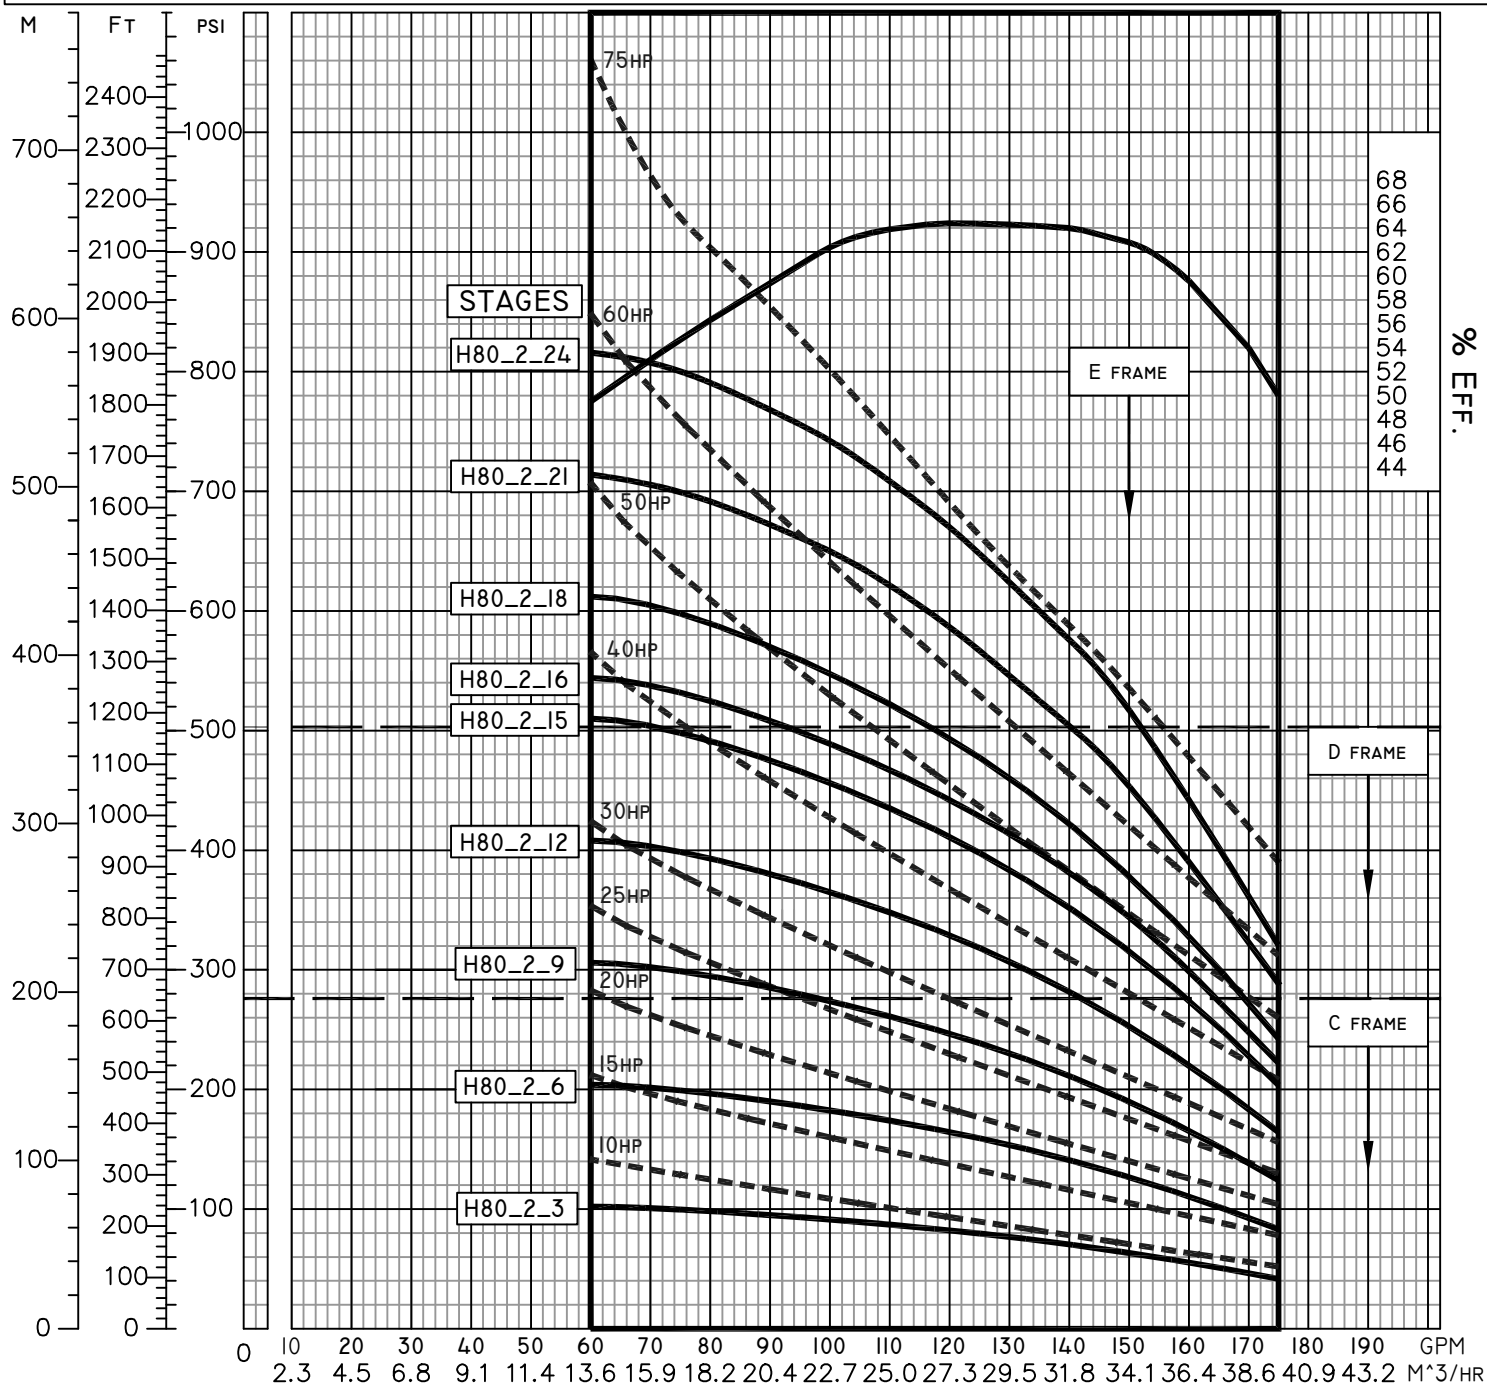

PERFORMANCE IS BASED ON 3600 (NOMINAL) RPM, 60 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED CURVE MAY BE ORDERED AT ADDITIONAL COST IF ACCOMPANIED BY AN ORDER AND ONLY AFTER PUMP HAS BEEN TESTED.

MANUFACTURED BY: T&T PUMP Co. INC.
RT 8 BOX 343
FAIRMONT, WV 26554



SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT NOTICE

6/5/00